


martin valmore s.r.l.
31010 Orsago (TV) – Italy
Via Bocche di Sotto, 4 z.i.
c.f. / p.iva it 01864620263

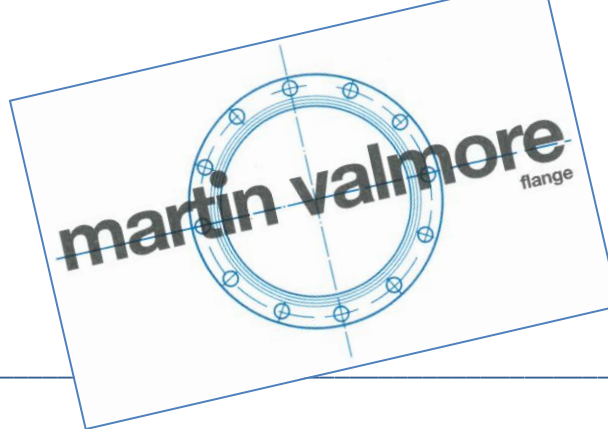

tel. +39 0438 990850
fax. +39 0438 991395

www.martinvalmore.it
info@martinvalmore.it

3-FLANGE DISMANTLING JOINT

MODEL: G3F

General description:

- " Material of construction: Carbon Steel S235JR/P245GH or better (according to EN10025-90) per pipes and flanges (other materials on request)***
- " Drilling according to EN1092-1 / UNI / DIN / BS / NFE / ANSI / AWWA / etc.***
- " Tie-rods (DIN975), nuts (DIN934) and washers (DIN125A) in Electrostatically Galvanized Carbon Steel (5 nuts and washers each tie-rod). Please note that tie-rods are completely threaded and as many as the flange holes (100%).***
On request fasteners in Hot dip galvanized carbon steel or in A2 (AISI304) Stainless Steel or in A4 (AISI316) Stainless Steel.
- " Protecting caps for tie-rods***
- " Seal by means of EPDM rubber ring***
- " Shot-blasting according to ISO8501-1:1988 Standard***
- " Internal and external protection based on Blue RAL 5005 epoxy powder coating having the requirements of numerous European bodies for contact with drinking water, including in particular: DGS (F) - KTW/W270 (G) - WRAS (GB) – BELGAQUA (B) – DM 174 (It)***
(other paints or colors on request);
All joints up to DN2000 PN6-10-16, DN1200 PN25, DN600 PN40-63-100 are painted by means of epoxy powder coating (others on request).
- " Paint thickness: 250-300 μ m (others on request)***
- " Fully assembled***
- " Stroke: \pm 25 mm. (others on request)***
- " Made in Italy***